




Semi-Rigid Slab Interlock Stabilizing Procedure

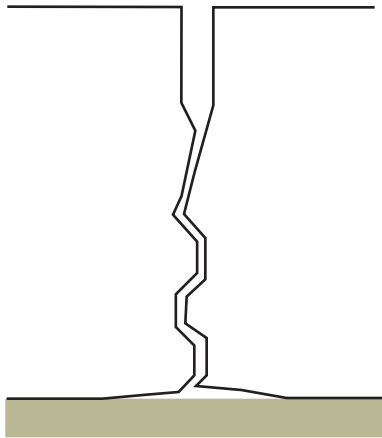


Original Condition

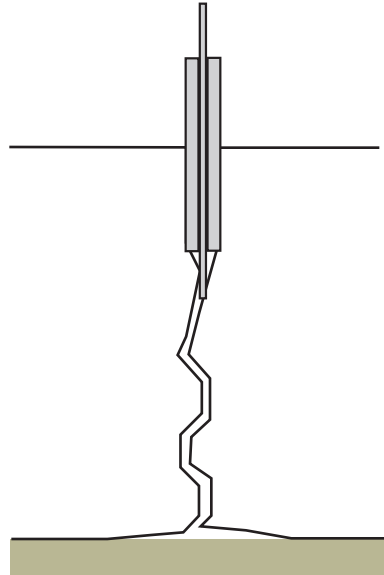

Gang blade cut to re-establish original joint, create deeper center joint to allow for increased penetration to slab base

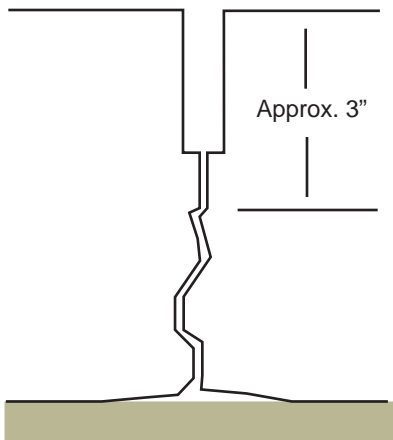

Pre-Filled Condition

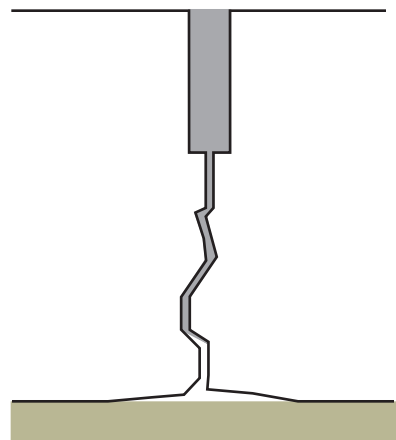

Gravity fill joint with semi-rigid filler- MM-80, MM-80P or Spal-Pro 2000- in multiple passes until filler remains at floor surface level, razor off excess filler above slab flush with floor after cure

Finished Condition

